


PVAS

PVAS for PVP

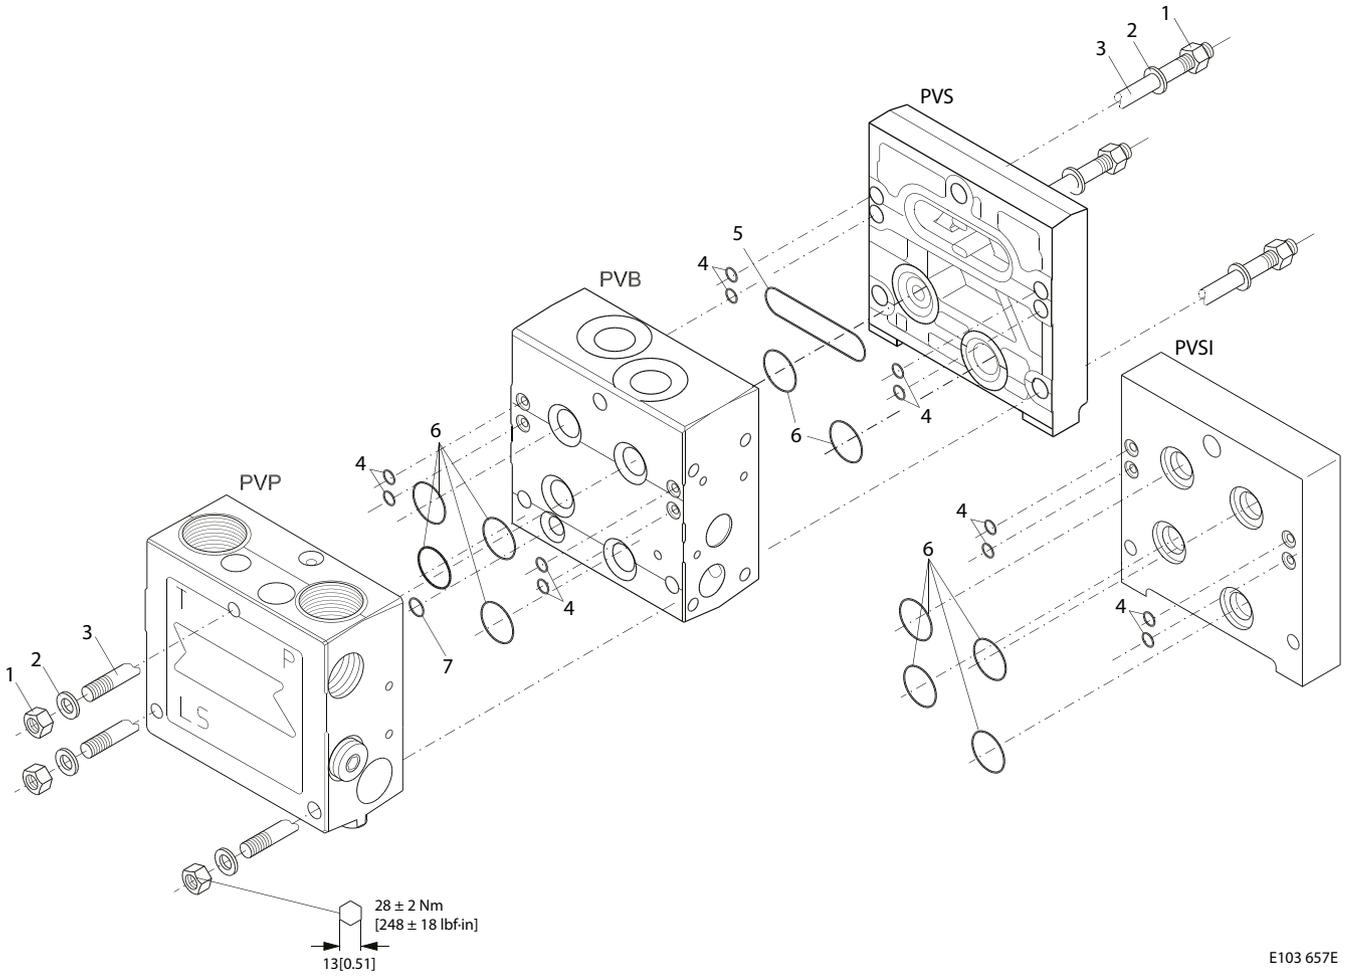

E103 657E

Steel quality	Appearance	Tightening torque
10.9	Yellow zinc chromate surface	28 ± 2 N-m [247.82 ± 17.7 lbf-in]

PVAS

Spare Parts PVAS for PVP

Type	Description	Code number	Letter
PVAS	for 1 PVB on PVGI	157B8000	M
	for 1 PVB basic module / for 2 PVB on PVGI	157B8001	L
	for 2 PVB basic module / for 3 PVB on PVGI	157B8002	K
	for 3 PVB basic module / for 4 PVB on PVGI	157B8003	J
	for 4 PVB basic module / for 5 PVB on PVGI	157B8004	I
	for 5 PVB basic module / for 6 PVB on PVGI	157B8005	H
	for 6 PVB basic module / for 7 PVB on PVGI	157B8006	G
	for 7 PVB basic module / for 8 PVB on PVGI	157B8007	F
	for 8 PVB basic module	157B8008	E
	for 9 PVB basic module	157B8009	D
	for 10 PVB basic module	157B8010	C
	for 11 PVB basic module	157B8061	B
for 12 PVB basic module	157B8062	A	

Spare Kits Available

Item	Description	Letter												
		A	B	C	D	E	F	G	H	I	J	K	L	M
1	Nut 8.0	6	6	6	6	6	6	6	6	6	6	6	6	3
2	Washer 8.1 • 15.2 • 1.5 [0.53 • 0.69 • 0.06 in]	6	6	6	6	6	6	6	6	6	6	6	6	3
3	Stay bolt M8; L = 91 [3.58 in]													3
	Stay bolt M8; L = 140 [5.51 in]												3	
	Stay bolt M8; L = 189 [7.44 in]											3		
	Stay bolt M8; L = 238 [9.37 in]										3			
	Stay bolt M8; L = 287 [11.30 in]									3				
	Stay bolt M8; L = 336 [13.24 in]								3					
	Stay bolt M8; L = 385 [15.16 in]							3						
	Stay bolt M8; L = 434 [17.07 in]							3						
	Stay bolt M8; L = 483 [19.02 in]					3								
	Stay bolt M8; L = 527 [20.75 in]				3									
	Stay bolt M8; L = 576 [22.68 in]			3										
	Stay bolt M8; L = 625 [24.61 in]		3											
Stay bolt M8; L = 674 [26.54 in]	3													
4*	O-ring Ø 5.0 • 2.0 [0.20 • 0.08 in]	52	48	44	40	36	36	32	28	24	20	16	12	8
5*	Profile O-ring	1	1	1	1	1	1	1	1	1	1	1	1	11


PVAS

Spare Kits Available (continued)

Item	Description	Letter												
		A	B	C	D	E	F	G	H	I	J	K	L	M
6*	O-ring Ø 16.0 • 2.5 [0.63 • 0.10 in]	56	52	48	44	40	36	32	28	24	20	16	12	8
7*	O-ring Ø 10.0 • 2.5 [0.39 • 0.10 in]	12	11	10	9	8	7	6	5	4	3	2	1	1
*	Set of seals	1	1	1	1	1	1	1	1	1	1	1	1	1

PVAS

PVAS for PVPV/M

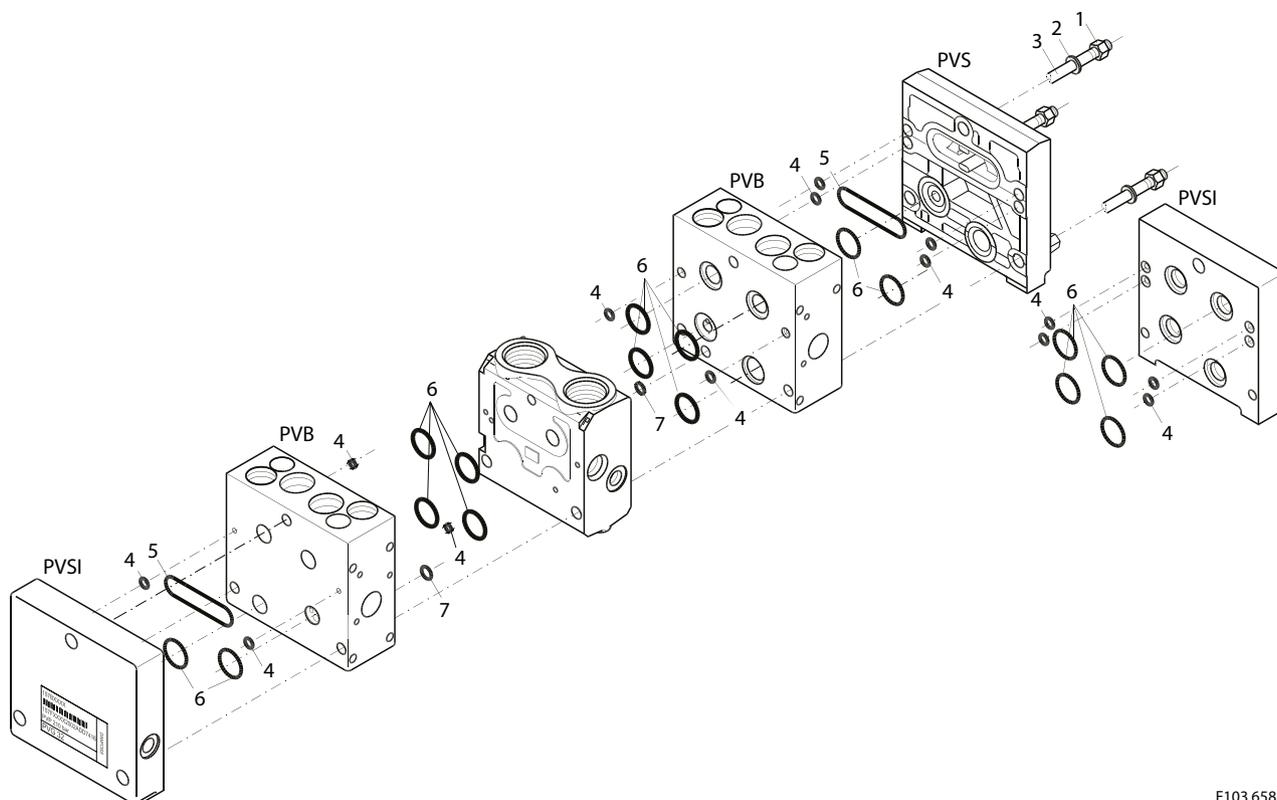

E103 658E

Spare Parts PVAS for PVPV/M

Type	Description	Code number	Letter
PVAS	for 1 PVB basic module	157B8021	L
	for 2 PVB basic module	157B8022	K
	for 3 PVB basic module	157B8023	J
	for 4 PVB basic module	157B8024	I
	for 5 PVB basic module	157B8025	H
	for 6 PVB basic module	157B8026	G
	for 7 PVB basic module	157B8027	F
	for 8 PVB basic module	157B8028	E
	for 9 PVB basic module	157B8029	D
	for 10 PVB basic module	157B8030	C
	for 11 PVB basis module	157B8081	B
	for 12 PVB basis module	157B8082	A

Item	Description	Letter											
		A	B	C	D	E	F	G	H	I	J	K	L
1	Nut 8.0	6	6	6	6	6	6	6	6	6	6	6	6
2	Washer 8.1 • 15.2 • 1.5 [0.53 • 0.69 • 0.06 in]	6	6	6	6	6	6	6	6	6	6	6	6

PVAS

Item	Description	Letter											
		A	B	C	D	E	F	G	H	I	J	K	L
3	Stay bolt M8; L = 166 [6.54 in]												3
	Stay bolt M8; L = 213 [8.39 in]											3	
	Stay bolt M8; L = 262 [10.31 in]										3		
	Stay bolt M8; L = 311 [12.20 in]									3			
	Stay bolt M8; L = 360 [14.17 in]								3				
	Stay bolt M8; L = 409 [16.10 in]							3					
	Stay bolt M8; L = 458 [17.95 in]						3						
	Stay bolt M8; L = 507 [19.96 in]					3							
	Stay bolt M8; L = 551 [22.00 in]				3								
	Stay bolt M8; L = 600 [23.62 in]			3									
	Stay bolt M8; L = 649 [24.61 in]		3										
Stay bolt M8; L = 698 [26.54 in]	3												
4*	O-ring Ø 5.0 • 2.0 [0.20 • 0.08 in]	56	52	48	44	40	36	32	28	24	20	16	12
5*	Profile O-ring	2	2	2	2	2	2	2	2	2	2	2	2
6*	O-ring Ø 16.0 • 2.5 [0.63 • 0.10 in]	56	52	48	44	40	36	32	28	24	20	16	12
7*	O-ring Ø10.0 • 2.5 [0.39 • 0.10 in]	12	11	12	11	10	9	8	7	6	5	4	1
*	<i>Set of seals</i>	1	1	1	1	1	1	1	1	1	1	1	1